

■ 2048 x 1536

■ 123 fps

Fusion Series 

❖ **FS-3200D-10GE**
3.2 megapixel CMOS multi-spectral

GigE[®]
VISION



- **Multi-spectral prism camera with two 1/1.8" CMOS imagers**
- **Simultaneously captures visible color and near-IR images through the same optical path**
- **3.45 x 3.45 μ m pixel sizes with support for 1x2, 2x1, or 2x2 binning**
- **Up to 123 fps over high performance 10GBASE-T (10 gigabits per second) interface**
- **Backwards compatible to NBASE-T (5GBASE-T/2.5GBASE-T) and standard GigE (1000BASE-T)**
- **Single and multi-ROI modes provide higher speeds with lower processing loads**
- **8, 10, or 12-bits per channel***
- **5x5 de-Bayering available for RGB output on color channel**
- **Supports separate or unified control of key camera parameters for each channel**
- **Excellent shock and vibration resistance**
- **GigE Vision 2.0 interface with dual-stream output**
- **C-mount lens mount**

* Some video processing functions not available with 12-bit output

www.jai.com



See the possibilities

Specifications for FS-3200D-10GE

Fusion Series


Specifications		FS-3200D-10GE
Sensor		1/1.8" 2-CMOS global shutter (IMX252)
Active pixels		2048 (h) x 1536 (v) x 2 (Bayer / NIR)
Frame rate, full frame		123 frames/sec. @ 8-bit
Active area		7.07 mm (h) x 5.30 mm (v) - 8.83 mm diagonal
Pixel size		3.45 μm x 3.45 μm
System clock		74.25 MHz (for pulse generator)
Read-out modes	Full ROI (single) ROI (multi) Binning	2048 (h) x 1536 (v) for each channel H: 16 to 2048 pixels in 16 pixel steps V: 2 to 1536 lines in 2 line steps Up to 64 areas can be defined. No overlap. 1x2, 2x1, 2x2 (NIR only)
EMVA 1288 Parameters	Absolute sensitivity Maximum SNR	12-bit output format 4.30 p (λ = 525 nm), 8.86 p (λ = 810 nm) 39.45 dB green, 39.02 dB NIR
Traditional SNR*	color NIR	>60 dB (0 dB gain, 10-bit) >60 dB (0 dB gain, 10-bit)
Video signal output†	(Two streams)	Visible: BayerRG8, BayerRG10, BayerRG10Packed, BayerRG12, BayerRG12Packed, RGB8, RGB10V1Packed, RGB10p32 NIR: Mono8, Mono10, Mono10Packed, Mono12, Mono12Packed
Video modes		Normal, Single ROI, Multi ROI, Sequencer (2 modes)
Gain		Manual control - master mode 0 to +24 dB R/B channels - individually -7 to +15 dB Auto gain control - off, continuous, one-push
White balance (Color channel only)		Off, 4 presets (3200K, 5000K, 6500K, 7500K), or one-push/continuous AWB (3000K to 9000K)
Gamma/LUT		0.45 to 1.0 (9 steps) or 257-point programmable LUT
Shading correction		Flat shading, color shading
Trigger input		Opto In (2), Pulse Generators (4), Software, TTL In (2), NAND Out (2), User Output (4)
Exposure modes		Timed/EPS, Trigger Width (to ∞), Auto Delayed readout option
Electronic shutter		(can be set independently for each channel) 14.73 μs to 8 sec. in 1 μs steps
Auto Level Control (ALC)		Shutter range from 100 μs, gain range from 0 dB to +24 dB. Tracking speeds and max. values adjustable.
Blemish compensation		Up to 200 px/channel
Operating temp. (ambient)		-5°C to +45°C (20 to 80% non-condensing)
Storage temp. (ambient)		-25°C to +60°C (20 to 80% non condensing)
Vibration		3G (20 Hz to 200 Hz, XYZ directions)
Shock		50G
Regulations		CE (EN61000-6-2, EN61000-6-3) FCC Part 15 Class B, RoHS/WEEE
Power	12-pin	+10V to +25V DC. 10.4 W typical @ +12 V
Lens mount		C-mount
Dimensions (H x W x L)		62 mm x 62 mm x 86.5 mm (excl. connectors)
Weight		270 g

Ordering Information

FS-3200D-10GE	2-CMOS multi-spectral camera with GigE Vision
---------------	---

*Traditional SNR is based on random noise in a single frame, where EMVA SNR measurements consider more comprehensive noise sources and variance over time.

Dimensions

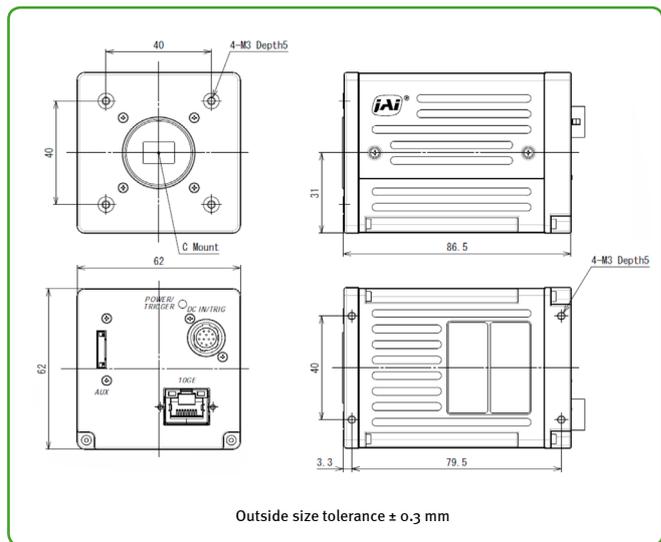

Connector pin-out

DC In / Trigger

HIROSE HR10A-10R-12PB(71)


Pin	Signal
1	Ground
2	DC in +10V to +25V
3	Opto In 2-
4	Opto In 2+
5	Opto In 1-
6	Opto In 1+
7	Opto Out 1-
8	Opto Out 1+
9	TTL out 1
10	TTL in 1
11	DC in +10V to +25 V
12	Ground

GigE Vision Interface

RJ-45 with locking screws

Pin	Signal
1	TRD+ (0)
2	TRD- (0)
3	TRD+ (1)
4	TRD+ (2)
5	TRD- (2)
6	TRD- (1)
7	TRD+ (3)
8	TRD- (3)

Spectral response

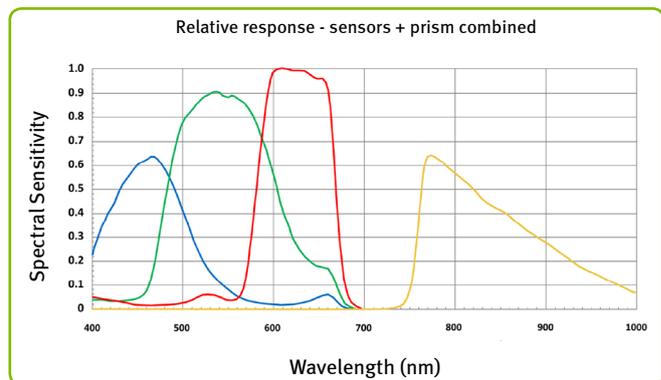

†12-bit output available in video processing bypass mode. See manual for details.