










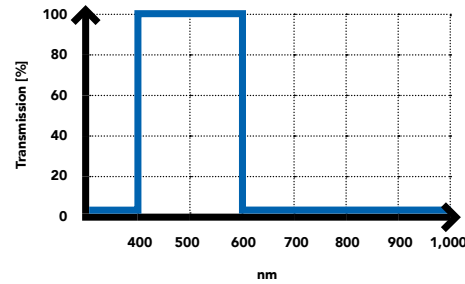






BANDPASS

Transmits a defined wavelength range

Key Features:

- Average transmission 95 %
- Steep slopes
- Wavelength tolerance +/- 1 nm
- Ultra low reflection
- Deep blocking / high OD



Color	Name	Status	Order name	Wavelength range, 50%–50% [nm]	Center wavelength [nm]	Bandwidth [nm]	Datasheet
	BP 465-70 HT	standard	BP 465-70 HT	430-500	465	70	Download ↓
	BP 490 -180 HT	on request	BP 490 -180 HT	400-580	490	180	Download ↓
	BP 515-270 HT	on request	BP 515-270 HT	380-650	515	270	Download ↓
	BP 520-280 HT	on request	BP 520-280 HT	380-660	520	280	Download ↓
	BP 540-80 HT	standard	BP 540-80 HT	495-580	540	80	Download ↓
	BP 540-300 HT	standard	BP 540-300 HT	390-690	540	300	Download ↓
	VIS-85 HT	on request	VIS-85 HT	420-640 / 830-870	530 / 850	220 / 40	Download ↓
	BP 575-170 HT	standard	BP 575-170 HT	495-660	575	170	Download ↓
	BP 590-50 HT	standard	BP 590-50 HT	565-615	590	50	Download ↓
	BP 590-200 HT	on request	BP 590-200 HT	495-690	590	200	Download ↓
	BP 635-50 HT	standard	BP 635-50 HT	610-660	635	50	Download ↓
	BP 640-100 HT	on request	BP 640-100 HT	590-690	640	100	Download ↓
	BP 660-60 HT	standard	BP 660-60 HT	630-690	660	60	Download ↓
	BP 680-100 HT	on request	BP 680-100 HT	630-730	680	100	Download ↓
	BP 850-80 HT	standard	BP 850-80 HT	810-890	850	80	Download ↓
	BP 865-100 HT	standard	BP 865-100 HT	815-915	865	100	Download ↓