




Benefits:

- For cameras up to 40 x 40mm cross section
- Front tube for easy lens access
- Robust construction
- Compact size
- High IP protection class
- Flexible camera positioning
- High chemical resistance
- Vibration-proof mounting
- Camera mount included
- Excellent heat dissipation



Technical Details:

Max. Camera Size (w x h)	40 x 40mm 29 x 47mm	Weight (without camera mount)	Approx. 880g
Max. Lens Diameter	55mm	Enclosure Material	Anodized Aluminum
Inner Length	191mm 41mm (tube)	Enclosure Seals	NBR, EPDM
Enclosure Dimensions (w x h x l, without cable gland)	66 x 66 x 206mm	Cable Gland Aperture (max. connector size)	22mm (Rear Wall A) 13.5mm (Rear Wall B) 16.5mm (Rear Wall B) 26.5mm (Rear Wall C)
Window Aperture	45mm	Cable Diameter	4-6.5mm (Rear Wall B) Self drilling (Rear Wall C)
Standard Window	BK7, double sided ARC	Cable Gland Seal	TPE
IR Mirror	Order No.: 20.000.010*		
Sapphire	Order No.: 20.000.016*		
Germanium	Order No.: 20.000.017*		
Acrylic, uncoated	Order No.: 20.000.058*		
Acrylic, double sided ARC	Order No.: 20.000.029*		
Window Seal	EPDM		
Protection Class	IP66 (Nema 4) IP67 (Nema 6)		

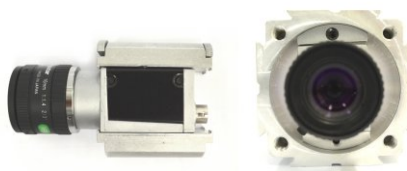

The mount guarantees excellent heat dissipation

*Please ask for the product number of the spare part



Order Numbers:

Product ID	Camera Height	Camera Length	Enclosure Type	Rear Wall Type	Length
2	29: 0 30: 1 31: 2 32: 3 33: 4 34: 5 35: 6 36: 7 38: 8 40: 9	< 50mm: 3 < 74mm: 5 < 92mm: 7	6	A: 0 B: 1 C: 2 D: 3	150

Example: 20.362.150 | Lizard | camera height 29mm | camera length <50mm | rear wall C



Accessories:

*Please ask for the product number of the spare part



Product	Image	Order No.	Product	Image	Order No.	Product	Image	Order No.
Air Nozzle		50.100.025	Cooling Module		60.100.010	Mounting Kit 2		5.020.000
2" Wind Curtain		50.100.010	El. Heating Plate		70.100.018	Mounting Kit 6		5.060.000
Tube for W. Curtain		50.100.017	Orca Adapter		15.030.001	Mounting Kit 7		5.070.000
Pneumatic Shutter		50.200.010	Sun Roof Size S, M, L		20.010.002 20.010.003	Mounting Kit 9		5.090.000
Deflection Mirror 90°		20.020.004	LaserMount 19 or 20mm		14.100.019 14.100.020	Mounting Kit 10		5.100.000
30/60mm Extension		15.015.030 15.015.060	Corrugated Tube 28mm		20.000.006	Mounting Kit 15		5.150.000
60mm Side Exit		15.015.061	Mounting Kit 1		5.010.000	Mounting Kit 16/16m		5.160.000 5.160.000m
Position Ring		20.020.003				Mounting Kit 17/17m		5.170.000 5.170.000m



Front Lid



Profile

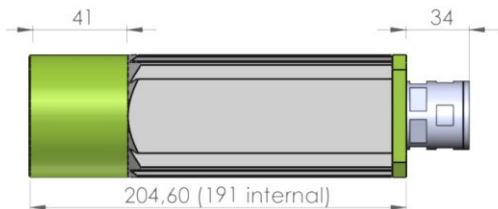

Rear Wall A



Rear Wall B



Rear Wall C



Rear Wall D

