


## CABLE MISC-FULL-LINEA-GE-OP-xM



	Color		Pin	Cameraside
white terminal crimps	<b>Bulk cable type 8x twisted-pair x AWG24 C UL black jacket</b>			<b>DSUB 15 (male) (3-rows)</b>
<b>Split: ca. 30 cm</b>				<b>Shielded DSUB housing Screws UNC 4-40</b>
Line 1+	<b>green</b>	◇	1	Line 1+
Line 1-	<b>black</b>	◇	2	Line 1-
Line 2+	<b>yellow</b>	◇	3	Line 2+
Line 2-	<b>black</b>	◇	4	Line 2-
Signal Ground	<b>brown + black</b>	◇	5	Signal Ground
Line 3+	<b>orange</b>	◇	6	Line 3+
Line 3-	<b>black</b>	◇	7	Line 3-
Line 4+	<b>blue</b>	◇	8	Line 4+
Line 4-	<b>black</b>	◇	9	Line 4-
Line 5+	<b>purple</b>	◇	11	Line 5+
Line 5-	<b>black</b>	◇	12	Line 5-
Line 6+	<b>grey</b>	◇	13	Line 6+
Line 6-	<b>black</b>	◇	14	Line 6-
PWR-VCC	<b>red</b>	◇	15	PWR-VCC
PWR-GND	<b>black</b>	◇	10	PWR-GND
	<b>white (AWG 20)</b>	◇		Mainshield

# CABLE MISC-FULL-LINEA-GE-OP-xM

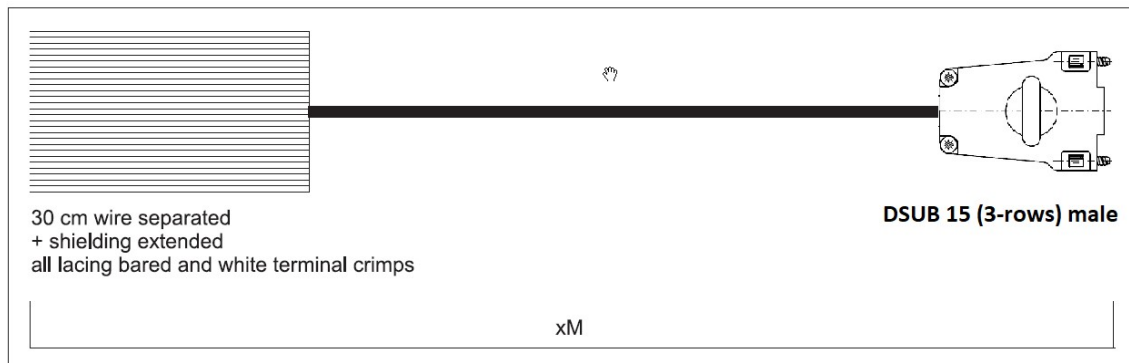

Cable label:

